


LANAC

LANAC G100

LANAC G100

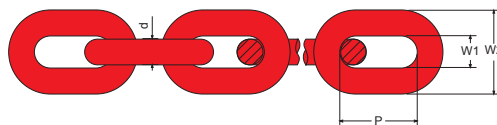

Šifra.	Veličina d _{xp} (mm)	Širina(mm)		Nosivost t	Isptiana sila min(kN)	Prekidna sila min(kN)	Težina kg/m
		W1(unutaranja.min.)	W2(vanjska)				
18481	4X12	5	13 ^{+0.30}	0.63	15.7	25.1	0.35
18482	5X15	6.25	17 ^{+0.38}	1.0	24.5	39.3	0.54
18483	6X18	7.5	20 ^{+0.45}	1.45	35.3	56.5	0.80
18484	6.3X19	7.88	21 ^{+0.48}	1.6	39	62.3	0.87
18485	7X21	8.75	23 ^{+0.53}	2.0	48	76.9	1.1
18486	8X24	10	26 ^{+0.60}	2.5	62.8	101	1.4
18487	10X30	11.25	30 ^{+0.68}	4.0	79.5	127	1.8
18488	13X39	12.5	33 ^{+0.75}	6.7	98.2	157	2.2
18489	16X48	13.75	36 ^{+0.83}	10.0	118.6	190	2.6

LANAC



Automatski stroj za varenje lanca WAFIOS

- Proizvedeno prema standardu EN818-2 ali sa puno većom nosivošću (+25%)
- Maksimalna temperatura rada: 200°C
- Visoka kvaliteta za duži radni vijek te puno sigurniji i puno lakši od proizvoda G80.



Ispitivanje čvrstoće materijala

