


### ŠKOPAC TRBUŠASTI VISOKOOTPORNI US TIP G209 S209

FAKTOR SIGURNOSTI 6:1



Oznaka utisnuta

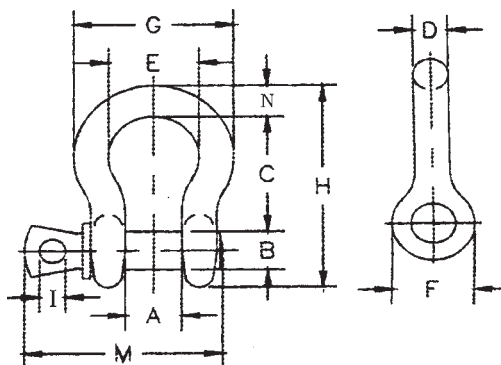

Škopac visokotporni je proizveden prema U.S. Federal Specification RR-C-271 Tip IVA. Klasa 2. Kvaliteta A. Vruće cinčani

| Šifra  | Veličina | Nosivost<br>(t) | Dimenzije<br>(mm) |      |      |      |      |      |      |      |      |      |      | Težina<br>kom.<br>(kg) |
|--------|----------|-----------------|-------------------|------|------|------|------|------|------|------|------|------|------|------------------------|
|        | (in.)    |                 | A                 | B    | C    | D    | E    | F    | G    | H    | I    | M    | N    |                        |
| 21151  | 3/16     | 1/3             | 9.65              | 6.35 | 22.4 | 4.85 | 15.2 | 14.2 | 24.9 | 37.3 | 4.06 | 28.4 | 4.85 | 0.03                   |
| 21152  | 1/4      | 1/2             | 11.9              | 7.85 | 28.7 | 6.35 | 19.8 | 15.5 | 32.5 | 46.7 | 4.85 | 35.1 | 6.35 | 0.05                   |
| 21153  | 5/16     | 3/4             | 13.5              | 9.65 | 31.0 | 7.85 | 21.3 | 19.1 | 37.3 | 53.0 | 5.60 | 42.2 | 7.85 | 0.09                   |
| 21154  | 3/8      | 1               | 16.8              | 11.2 | 36.6 | 9.65 | 26.2 | 23.1 | 45.2 | 63.0 | 6.35 | 51.5 | 9.65 | 0.14                   |
| 21155  | 7/16     | 1-1/2           | 19.1              | 12.7 | 42.9 | 11.2 | 29.5 | 26.9 | 51.5 | 74.0 | 7.85 | 60.5 | 11.2 | 0.17                   |
| 21156  | 1/2      | 2               | 20.6              | 16.0 | 47.8 | 12.7 | 33.3 | 30.2 | 58.5 | 83.5 | 9.65 | 68.5 | 12.7 | 0.33                   |
| 21157  | 5/8      | 3-1/4           | 26.9              | 19.1 | 60.5 | 16.0 | 42.9 | 38.1 | 74.5 | 106  | 11.2 | 85.0 | 17.5 | 0.62                   |
| 21158  | 3/4      | 4-3/4           | 31.8              | 22.4 | 71.5 | 19.1 | 51.0 | 46.0 | 89.0 | 126  | 12.7 | 101  | 20.6 | 1.07                   |
| 21159  | 7/8      | 6-1/2           | 36.6              | 25.4 | 84.0 | 22.4 | 58.0 | 53.0 | 102  | 148  | 12.7 | 114  | 24.6 | 1.64                   |
| 21160  | 1        | 8-1/2           | 42.9              | 28.7 | 95.5 | 25.4 | 68.5 | 60.5 | 119  | 167  | 14.2 | 129  | 26.9 | 2.28                   |
| 21161  | 1-1/8    | 9-1/2           | 46.0              | 31.8 | 108  | 29.5 | 74.0 | 68.5 | 131  | 190  | 16.0 | 142  | 31.8 | 3.36                   |
| 21162  | 1-1/4    | 12              | 51.5              | 35.1 | 119  | 32.8 | 92.5 | 76.0 | 146  | 210  | 17.5 | 156  | 35.1 | 4.31                   |
| 21163  | 1-3/8    | 13-1/2          | 57.0              | 38.1 | 133  | 36.1 | 92.0 | 84.0 | 162  | 233  | 19.1 | 174  | 38.1 | 6.14                   |
| 21164  | 1-1/2    | 17              | 60.5              | 41.4 | 146  | 39.1 | 98.5 | 92.0 | 175  | 254  | 20.6 | 187  | 41.1 | 7.80                   |
| 21165  | 1-3/4    | 25              | 73.0              | 51.0 | 178  | 46.7 | 127  | 106  | 225  | 313  | 25.4 | 231  | 57.0 | 12.6                   |
| 21166  | 2        | 35              | 82.5              | 57.0 | 197  | 53.0 | 146  | 122  | 253  | 348  | 31.0 | 263  | 61.0 | 20.4                   |
| 21166A | 2-1/4    | 42.5            | 95                | 65   | 220  | 57.0 | 160  | 143  | 274  | 32   | 33.0 | 321  | 66.0 | 32                     |
| 21167  | 2-1/2    | 55              | 105               | 70.0 | 267  | 69.0 | 184  | 145  | 327  | 453  | 35.1 | 330  | 79.5 | 38.9                   |