


5. DIZALICE, KOLICA I HVATALJKE Hoists, clamps

5.1. Dizalice lančane ručne

Kolica za dizalicu "STANDARD" tip GCT 619 RX-lift

Plain travel trolley type GCT619 RX-lift

2.1 2.2 CE MTCa

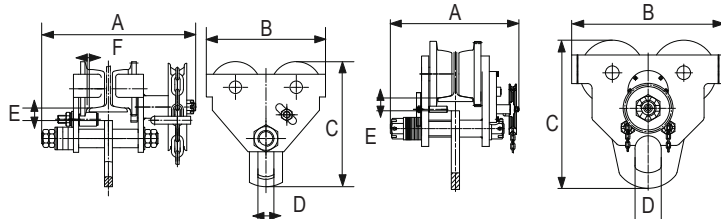


• EN 13157

Nosivost (t)	Ispitna sila (t)	Širina I-profila (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Min. radius (m)	Neto težina (kg)
Capacity	Proof load	I-Beam width							Min. radius curve	Net weight
0,5	0,625	64-140	230	212	198,5	24	28	≈3	0,6	7
1	1,25	64-140	254	255	231,5	30,5	25	≈3	0,8	12
2	2,5	76-165	294	302	278	36	27	≈3	1,1	20,5
3	3,75	76-203	344	344	338	45	32	≈3	1,4	33
5	6,25	88-203	360	378	393	60	34	≈5	1,0	51
10	12,5	125-203	403	455	490	82	36,5	≈5	1,3	86,5

Kolica za dizalicu upravljiva lancem "COMPACT" tip GCL 619 RX-lift

Geared travel trolley type GCL 619 RX-lift

2.1 2.2 CE MTCa

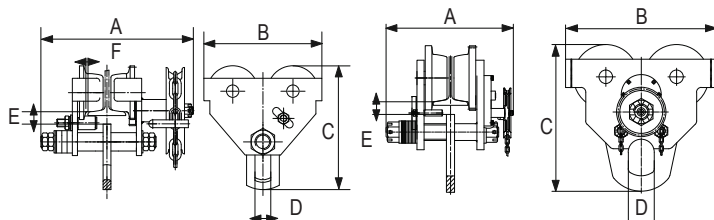

• EN 13157

Nosivost (t)	Ispitna sila (t)	Širina I-profila (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	Min. radius (m)	Neto težina (kg)
Capacity	Proof load	I-Beam width							Min. radius curve	Net weight
0,5	0,625	64-140	308,5	212	198,5	24	28	≈3	0,6	11,6
1	1,25	64-203	328,5	255	231,5	30,5	25	≈3	0,8	17
2	2,5	76-203	361,5	302	278	36	27	≈3	1,1	25,5
3	3,75	76-305	428,5	344	338	45	32	≈3	1,4	39
5	6,25	88-305	434	378	393	60	34	≈5	1,0	57
10	12,5	125-305	487,5	455	490	82	36,5	≈5	1,3	93
20	25	136-305	523	642	622	110	54	≈5	4,7	247,5
30	3	144-305	570	642	622	110	50	≈5	4,7	254