

# 1. ČELIČNA UŽAD I LANCI Wire ropes and chains


## 1.11. Visokootporni lanac za dizanje

### Lanac G80 za ručne dizalice EN 818-7 RX-lift

Manual hoists chain G80 acc. to EN 818-7

2.1 2.2 3.1 BL

Promjer a (mm)	b (mm)	c (mm)	Težina (1m/kg)	Prekidna sila (kN)
Diameter			Weight	Breaking load
4	12	13	0.35	20.2
5	15	17	0.56	31.6
6	18	22.2	0.80	45.4
7	21	25.9	1.08	61.6
8	24	29.6	1.43	80.6
10	30	37.0	2.22	126.0

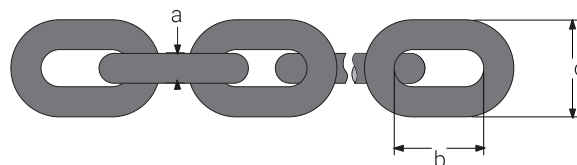

- lanac prema standardu: EN 818-7 (DIN 5684)
- lanac G80 je visokokvalitetni lanac za lančane ručne dizalice
- specijaliziran za dinamička i statička opterećenja
- kalibrirane karike lanca
- faktor sigurnosti: 4.0
- završna obrada: cinčani




### Lanac kvadratnih karika G80 RX-lift

Square link chain G80

2.1 2.2 3.1 BL

Promjer a (mm)	b (mm)	c (mm)	Težina (1m/kg)	Prekidna sila (kN)
Diameter			Weight	Breaking load
7	24	10	1,4	80
8	28	11	1,5	90
10	35	14	2,2	126

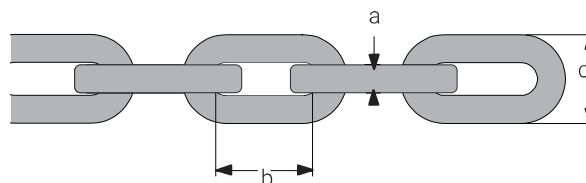

- lanac prema standardu: EN 818-2
- visokokvalitetni lanac za prijenos i vuču tereta
- prikladan u šumarstvu
- specijaliziran za dinamička i statička opterećenja
- kalibrirane karike lanca
- faktor sigurnosti: 4.0
- dostupni elementi za lanac G80
- završna obrada: prirodna boja, ili lakirani

