


VITLA

ELEKTRIČNO VITLO J TIP




05601,05602,05603(Jednofazno)

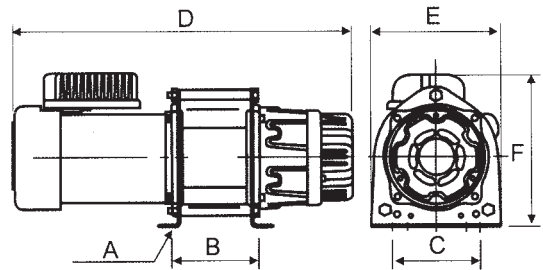

05601,05602,05603,05611



05612,05613,05614(Trofazno)

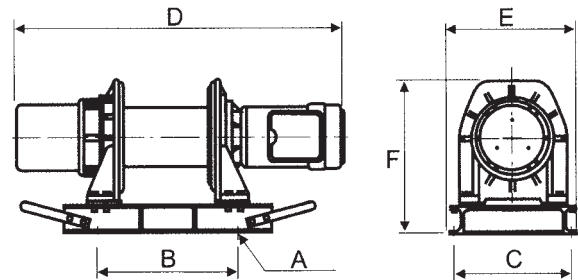

05612,05613,05614

Specifikacija

Šifra	Nosivost (kg)	Brzina (m/min)	Motor (hp×p)	Napon (v)	Frekvencija (Hz)	Visina dizanja (m)	Čelično uže (ø mmxm)	Idealan radni ciklus	Težina (kg)
05601	200	10-15 12-18	0.8×4	Jedna faza 120V,220V, 230V,240V	50	29	6×30	25% ED (150puta/h maks. startna frekvencija)	37
05602	250	10-15 12-18	1.0×4		50	29	6×30		41
05603	300	10-15	1.5×4	50	29	7×30	50		
		12-18		60					
05611	300	10-15	1.5×4	Tri faze	50	29	7×30		49
05612	500	12-18	3.0×4	380V	50	58	9×60		150
05613	750	12-18	4.0×4	415V	50	58	9×60		163
05614	1000	12-18	5.5×4		50	58	11×60		170
05615	2200	7-12.5	7.5×4		50	97	16×100	450	
05616	3200	6.3-8.8	7.4×4		50	97	18x100	500	

Dimenzije

Šifra	A	B	C	D	E	F
05601	4-ø10.5	142	142	510	210	246
05602	4-ø10.5	142	142	525	210	246
05603	4-ø10.5	172	142	540	210	246
05611	4-ø10.5	172	142	548	210	246
05612	4-ø16	400	330	922	372	430
05613	4-ø15	400	330	935	372	430
05614	4-ø15	400	330	935	372	430
05615	4-ø22	600	499	1160	565	658
05616	8-ø30	847	680	1431	740	860

VITLA