


### LANAC G30 DIN763

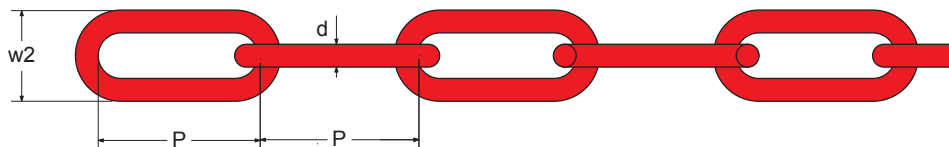

1. Prirodna boja
2. Elektro cinčano
3. Vruče cinčano
4. Inox AISI 304/AISI 316

Šifra	Dimenzija (d)		Unutarnja dužina (P)		Vanjska širina (w2)		Radna nosivost KG	Ispitana sila N	Prekidna sila N	Težina kg/m	
	MM	±MM	MM	±MM	MM	±MM					
18451	2.0	0.5	22	1.0	8	0.4	25	800	1250	0.06	
18452	2.5		24	1.1	10	0.5	40	800	2000	0.10	
18453	3		26	1.2	12	0.6	55	1050	3200	0.15	
18454	3.5		28	1.3	14	0.7	80	1540	3850	0.20	
18455	4		32	1.5	16	0.8	100	2000	6000	0.27	
18456	4.5		34	1.7	18	0.9	128	2500	6300	0.35	
18457	5		35	1.8	20	1.0	160	3150	10000	0.43	
18458	5.5		38.5	1.8	22	1.1	195	3800	9500	0.52	
18459	6		42	2.0	24	1.2	224	4500	14000	0.63	
18460	7		49	2.5	28	1.4	300	6000	18000	0.86	
18461	8		52	2.5	32	1.6	400	8000	25000	1.10	
18462	8.5		56	2.8	34	1.7	460	9000	22500	1.25	
18463	9		59	3.0	36	1.8	530	10500	32000	1.41	
18464	10		1	65	3.2	40	2.0	630	12500	40000	1.75
18465	11			72	3.4	44	2.0	790	15800	47500	2.11
18466	12	78		3.6	48	2.3	940	18800	56500	2.55	
18467	13	82		4.0	52	2.5	1000	21200	63000	2.95	
18468	16	100		5.0	64	3.2	1600	33000	100000	4.45	
18469	18	113		5.2	70	3.2	2120	42300	127000	5.65	
18470	19	119		5.6	72	3.4	2370	47300	142000	6.25	
18471	20	120		6.0	75	3.8	2500	50000	160000	7.00	
18472	22	127		6.0	82	4.0	3170	63300	190000	8.55	
18473	25	140		6.6	85	4.2	4090	81700	245000	10.90	
18474	28	152		7.0	96	4.7	6000	120000	300000	13.9	
18475	32	171		7.8	108	5.2	8000	160000	400000	18.2	