



ŠKOPAC RAVNI SA MATICOM VISOKOOTPORN I G2150 S2150

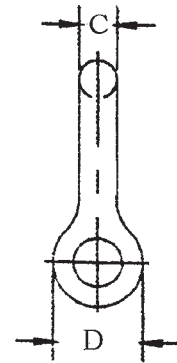

FAKTOR SIGURNOSTI 6:1

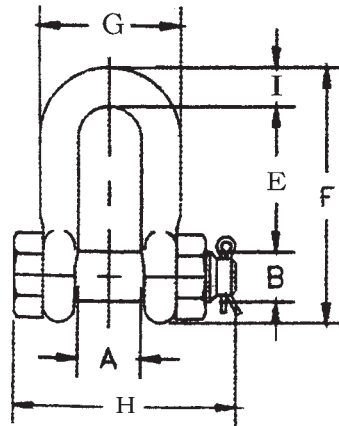

Oznaka utisnuta

Škopac visokootporni je proizveden prema
US Federal Specification RR-C-271
Tip IVB, Kvaliteta A. Klasa 3.
Vruće cinčan

Šifra	Veličina (in.)	Nosivost (t)	Dimenzije (mm)									Težina kom. (kg)
			A	B	C	D	E	F	G	H	I	
21231	1/4	1/2	11.9	7.85	6.35	15.5	19.1	40.4	24.6	39.6	6.35	0.06
21232	5/16	3/4	13.5	9.65	7.85	19.1	25.4	48.5	29.5	46.2	7.85	0.10
21233	3/8	1	16.8	11.2	9.65	23.1	31.0	58.5	35.8	55.0	9.65	0.15
21234	7/16	1-1/2	19.1	12.7	11.2	26.9	36.1	67.5	41.1	63.5	11.2	0.22
21235	1/2	2	20.6	16.0	12.7	30.2	41.4	77.0	46.0	71.0	12.7	0.34
21236	5/8	3-1/4	26.9	19.1	16.0	38.1	51.0	95.5	58.5	89.5	16.0	0.67
21237	3/4	4-3/4	31.8	22.4	19.1	46.0	60.5	115	70.0	103	20.6	1.14
21238	7/8	6-1/2	36.6	25.4	22.4	53.0	71.5	135	81.0	120	24.6	1.74
21239	1	8-1/2	42.9	28.7	25.4	60.5	81.0	151	93.5	135	25.4	2.52
21240	1-1/8	9-1/2	46.0	31.8	28.7	68.5	91.0	172	103	150	31.8	3.45
21241	1-1/4	12	51.5	35.1	31.8	76.0	100	191	115	165	35.1	4.90
21242	1-3/8	13-1/2	57.0	38.1	35.1	84.0	111	210	127	183	38.1	6.24
21243	1-1/2	17	60.5	41.4	38.1	92.0	122	230	137	196	41.1	8.39
21244	1-3/4	25	73.0	51.0	44.5	106	146	279	162	230	54.0	14.2
21245	2	35	82.5	57.0	51.0	122	172	312	184	264	51.0	21.2
21246	2-1/2	55	105	70.0	66.5	145	203	377	238	344	66.5	38.6
21247	3	85	127	82.5	76.0	165	216	429	279	419	89.0	56